




TOP VIEW

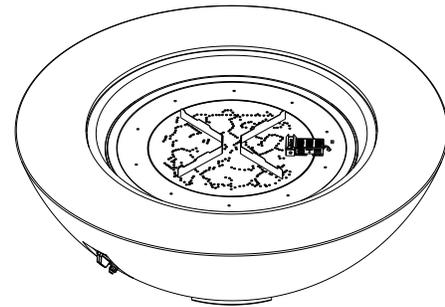

ISOMETRIC VIEW

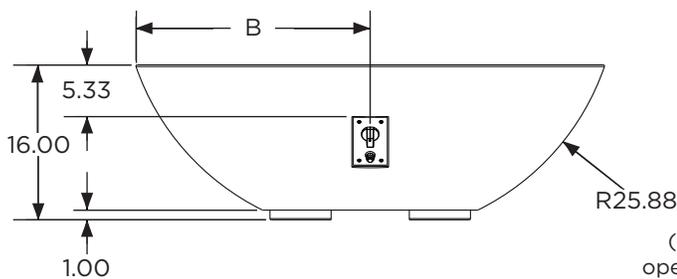

FRONT VIEW

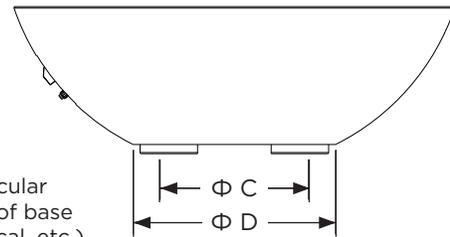

RIGHT VIEW

(Φ C refers to circular opening in bottom of base for plumbing, electrical, etc.)

ITEM CODE	BURNER INCLUDED	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	WEIGHT(lbs.)
CVB-36(XX)	CFP20	36.00	21.25	18.00	15.00	18.00	195
CVB-48(XX)	CFP30	48.00	32.25	24.00	18.00	22.00	300
CVB-54(XX)	CFP30	54.00	32.25	27.00	24.00	28.00	365
CVB-60(XX)	CFP30	60.00	32.25	30.00	30.00	34.00	440

Technical Specifications:

- CLEARANCE TO COMBUSTIBLES**
 - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials
- GAS SUPPLY**
 - Natural Gas - Operating Supply Pressure: Min 6" WC; Max 10.5" WC; IDEAL 7" WC
 - Liquid Propane - Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC
- CONTROLS**
 - Thermocouple safety valve and push-button sparker
 - Valve connected to burner; intended for installation on base control panel
- BURNER LISTING**
 - Standard: ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
 - Testing Agency: Underwriters Laboratories (UL LLC)
- BASE MATERIAL**
 - Glass-fiber reinforced concrete
 - Non-combustible material tested to ASTM E136-16

BASE COLOR DESIGNATORS (XX)	
NG	NATURAL GREY
WT	WHITE
LN	LINEN
MM	MIDNIGHT MIST
LT	LATTE
ES	EARTHSTONE

Optional Items: Tempered glass burner cover, tempered glass wind guard, additional media options