



TOP VIEW

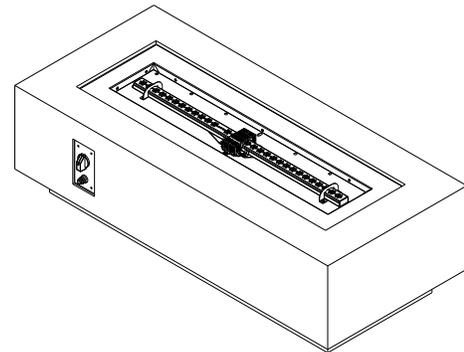


ISOMETRIC VIEW

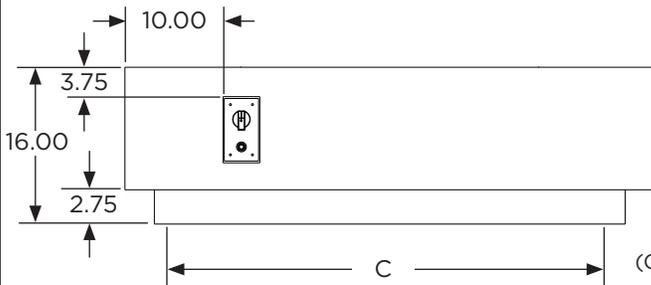

FRONT VIEW

(C X 14.00 refers to opening in bottom of base for plumbing, electrical, etc.)



RIGHT VIEW

ITEM CODE	BURNER INCLUDED	A (in.)	B (in.)	C (in.)	WEIGHT(lbs.)
CV-54(XX)	BP1242-CV-B	43.00	54.00	44.00	500
CV-72(XX)	BP1264-CV-B	64.50	72.00	62.00	568

Technical Specifications:

- CLEARANCE TO COMBUSTIBLES**
 - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials
- GAS SUPPLY**
 - Natural Gas - Operating Supply Pressure: Min 6" WC; Max 10.5" WC; IDEAL 7" WC
 - Liquid Propane - Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC
- CONTROLS**
 - Thermocouple safety valve and push-button sparker
 - Valve connected to burner; intended for installation on base control panel
- BURNER LISTING**
 - Standard: ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
 - Testing Agency: Underwriters Laboratories (UL LLC)
- BASE MATERIAL**
 - Glass-fiber reinforced concrete
 - Non-combustible material tested to ASTM E136-16

BASE COLOR DESIGNATORS (XX)	
-	NATURAL GREY
WT	WHITE
LN	LINEN
MM	MIDNIGHT MIST
LT	LATTE
ES	EARTHSTONE

Optional Items: Tempered glass wind guard, stainless steel burner cover, additional media options