



TOP VIEW

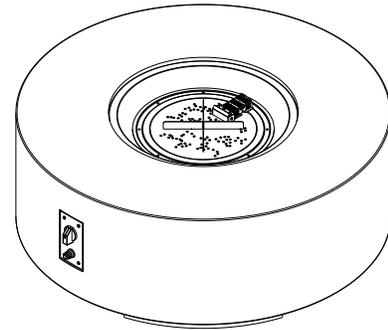


ISOMETRIC VIEW

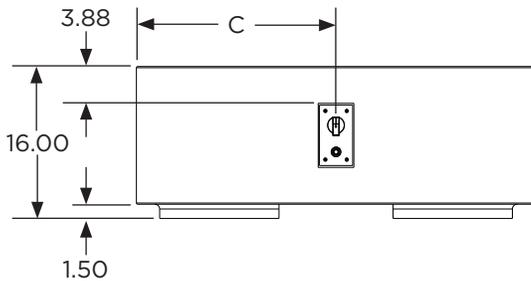

FRONT VIEW

(Φ D refers to circular opening in bottom of base for plumbing, electrical, etc.)

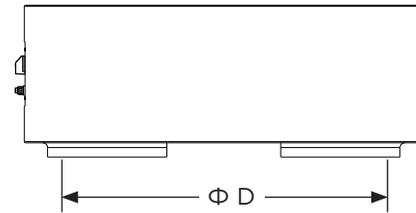

RIGHT VIEW

ITEM CODE	BURNER INCLUDED	A (in.)	B (in.)	C (in.)	D (in.)	WEIGHT(lbs.)
CVC-36(XX)	CFP20	36.00	21.25	18.00	31.00	230
CVC-42(XX)	CFP20	42.00	21.25	21.00	37.00	290
CVC-48(XX)	CFP30	48.00	32.25	24.00	43.00	345
CVC-60(XX)	CFP30	60.00	32.25	30.00	55.00	480
CVC-72(XX)	CFP30	72.00	32.25	36.00	67.00	635

**Technical Specifications:**

- CLEARANCE TO COMBUSTIBLES**
  - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials
- GAS SUPPLY**
  - Natural Gas - Operating Supply Pressure: Min 6" WC; Max 10.5" WC; IDEAL 7" WC
  - Liquid Propane - Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC
- CONTROLS**
  - Thermocouple safety valve and push-button sparker
  - Valve connected to burner; intended for installation on base control panel
- BURNER LISTING**
  - Standard: ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
  - Testing Agency: Underwriters Laboratories (UL LLC)
- BASE MATERIAL**
  - Glass-fiber reinforced concrete
  - Non-combustible material tested to ASTM E136-16

BASE COLOR DESIGNATORS (XX)	
NG	NATURAL GREY
WT	WHITE
LN	LINEN
MM	MIDNIGHT MIST
LT	LATTE
ES	EARTHSTONE

**Optional Items:** Tempered glass burner cover, tempered glass wind guard, additional media options