



TOP VIEW

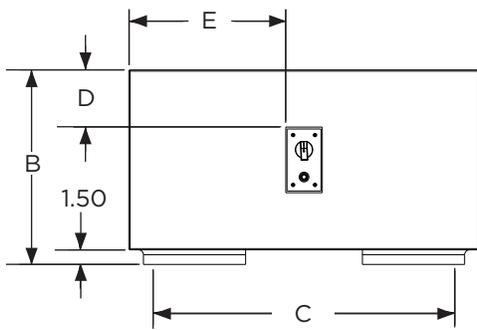


FRONT VIEW

(C X C refers to opening in bottom of base for plumbing, electrical, etc.)

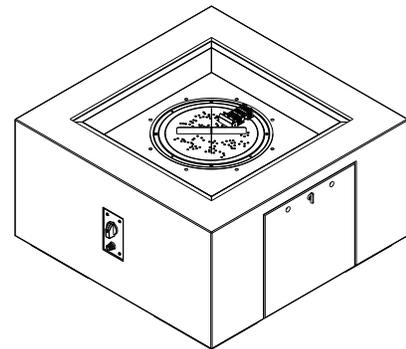

ISOMETRIC VIEW

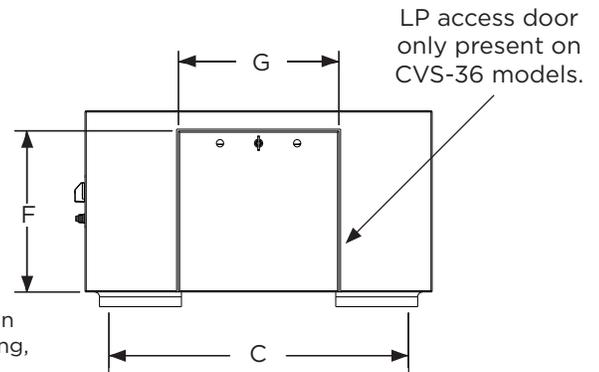

RIGHT VIEW

ITEM CODE	BURNER INCLUDED	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)	WEIGHT(lbs.)
CVS-36(XX)	CFP2424	36.00	22.00	31.00	6.88	16.13	16.63	16.44	315
CVS-42(XX)	CFP2424	42.00	16.00	35.00	3.88	19.13	N/A	N/A	360
CVS-48(XX)	CFP2424	48.00	16.00	41.00	3.88	22.13	N/A	N/A	435

### Technical Specifications:

- CLEARANCE TO COMBUSTIBLES**
  - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials
- GAS SUPPLY**
  - Natural Gas - Operating Supply Pressure: Min 6" WC; Max 10.5" WC; IDEAL 7" WC
  - Liquid Propane - Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC
- CONTROLS**
  - Thermocouple safety valve and push-button sparker
  - Valve connected to burner; intended for installation on base control panel
- BURNER LISTING**
  - Standard: ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
  - Testing Agency: Underwriters Laboratories (UL LLC)
- BASE MATERIAL**
  - Glass-fiber reinforced concrete
  - Non-combustible material tested to ASTM E136-16

BASE COLOR DESIGNATORS (XX)	
NG	NATURAL GREY
WT	WHITE
LN	LINEN
MM	MIDNIGHT MIST
LT	LATTE
ES	EARTHSTONE

**Optional Items:** Tempered glass burner cover, tempered glass wind guard, additional media options