



Model No.	Order No.	Notes:
REV30-BL	500005447	
REV30-HB	500005734	
REV30-WC	500005131	
REV30-NB	500005130	

Section 10309 - Manufactured Electric Fireplaces

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Manufactured electric fireplaces
- B. Accessories

1.2 RELATED SECTIONS

- A. Section 06100 - Rough Carpentry: Wood framed rough opening and enclosure

1.3 REFERENCES

- A. UL - 2021
- B. CSA - C22.2 No. 46-13

1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations
 - 2. Storage and handling requirements and recommendations
 - 3. Installation methods
- C. Manufacturer's Certificates: Certify products meet or exceed specified requirements.
- D. Manufacturer's warranty.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect materials from exposure to moisture. Do not deliver until after wet work is complete and dry.

1.6 WARRANTY

- A. Provide the manufacturer's 2-year limited warranty on electrical components.

PART 2 PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. Pre-fabricated Electric Fireplace:
 - 1. Base: Dimplex Electric Fireplace
Glen Dimplex Americas
1367 Industrial Road
Cambridge ON N3H 4W3
1-888-346-7539
www.dimplex.com
 - 2. Substitutions not permitted
 - 3. Requests for substitutions will be considered in accordance with provisions of Section 01600



Model No.	Order No.	Notes:
REV30-BL	500005447	
REV30-HB	500005734	
REV30-WC	500005131	
REV30-NB	500005130	

Section 10309 - Manufactured Electric Fireplaces

2.2 ELECTRIC FIREPLACES

A. General:

1. Provide all components and accessories required for a complete, functional unit
2. UL or CSA listed

B. Pre-fabricated Electric Fireplace:

1. Base Product:

- a) Dimplex Built-in Electric Firebox

Model No.	Material No.	Regulatory Model No.
REV30-BL	500005447	6909780700
REV30-HB	500005734	6909780800
REV30-WC	500005131	6909780600
REV30-NB	500005130	6909780500

2. Description: Revillusion 30" Built-in/Fireplace Insert Electric Firebox,with Glass and Plug Kit, in four backer designs: Black, Neutral Brick, Herringbone, and Weathered Concrete

3. Dimensions:

- a) Width: 31-1/8" / 79.2 cm
- b) Height: 26-1/2" / 67.3 cm
- c) Depth: 12-1/8" / 30.7 cm

4. Framing Dimensions:

- a) Width: 30-5/8" / 77.8 cm
- b) Height: 26-1/4" / 66.5 cm
- c) Depth: 12-1/2" / 31.8 cm

5. Weight:

- a) Product: 64 lbs / 29.1 kg
- b) Packaged: 83.6 lbs / 38 kg

6. Electrical:

- a) Volts: 120 / 208 / 240
- b) Watts: 1,300 / 1,975 / 2,575
- c) Flame Only Watts: 40
- d) BTUs: 4,400 / 6,745 / 8,794

7. Venting: Non-venting



Model No.	Order No.	Notes:
REV30-BL	500005447	
REV30-HB	500005734	
REV30-WC	500005131	
REV30-NB	500005130	

Section 10309 - Manufactured Electric Fireplaces

8. Operation: Flame only, flame and heat
9. Heating: Louver-less, fan-forced circulation
10. Liner: Steel
11. Standard features:
 - a) Self-trimming design with flange to finish rough openings
 - b) Patented flame technology create brighter and more random flames
 - c) Partially frosted acrylic panel highlights flame without any reflections
 - d) 270° firebox surround design available with any of the four backer options
 - e) Customizable firebox hues, mood lighting to adjust firebox light level
 - f) Powerful heating capabilities – use as part of primary heat plan
 - g) Direct-wire capabilities – 120V, 240/208V
 - h) Built-in touch controls
 - i) 30" Tempered Front Glass – 500000423
 - j) Plug Kit - X-RBFPLUG
12. Control options:
 - a) Multi-function remote control
 - b) Built-in touch controls
13. Optional Accessories:
 - a) Installation Trim Kit - X-RBF30TRIM38 and X-RBF30TRIM44

PART 3 EXECUTION

3.1 INSPECTION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- C. Verify proper power supply and fuel source are available.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions and requirements of authorities having jurisdiction.
- B. Use manufacturer's guidelines for minimum clearances to combustibles, walls, and finishes.
- C. Anchor all components firmly in position for long life under hard use.



Model No.	Order No.	Notes:
REV30-BL	500005447	
REV30-HB	500005734	
REV30-WC	500005131	
REV30-NB	500005130	

Section 10309 - Manufactured Electric Fireplaces

- D. Upon completion of installation, visually inspect all exposed surfaces. Touch up scratches and abrasions with touch up paint recommended by the manufacturer; make imperfections invisible to the unaided eye from a distance of 5 feet (1.5 m).

3.4 PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION





Model No.	Order No.	Notes:
REV30-BL	500005447	
REV30-HB	500005734	
REV30-WC	500005131	
REV30-NB	500005130	

Section 10309 - Manufactured Electric Fireplaces


Framing Dimensions:

	30" Revillusion
A	12-1/2" (31.8 cm)
B	30-5/8" (77.8 cm)
C	26-3/16" (66.5 cm)
D	25-3/4" (65.4 cm)
E	12-1/8" (30.7 cm)
F	29-3/8" (74.6 cm)
G	31-1/8" (79.2 cm)
H	22-3/4" (57.8 cm)
I	26-5/8" (67.6 cm)
J	54-1/4" (137.8 cm)
K	38-1/2" (97.8 cm)
L	38-1/2" (97.8 cm)

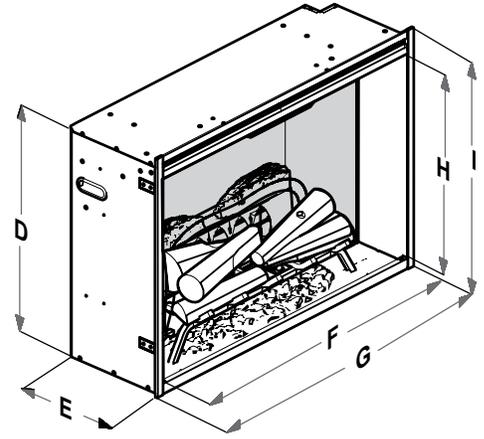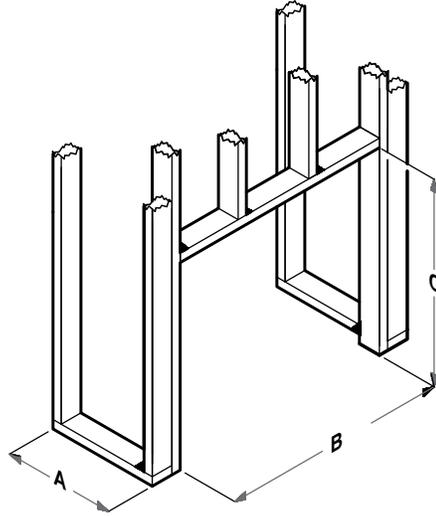

1. The Revillusion™ Electric Fireplace/ Fireplace Insert does not require any special venting.
2. To build the rough-in opening, follow the framing dimensions below.


NOTE: The materials used for the finished surround must be cut to precise dimensions (dimensions B & C) as the 1/4" (0.6 cm) self trimming flange is only to create a finished appearance.

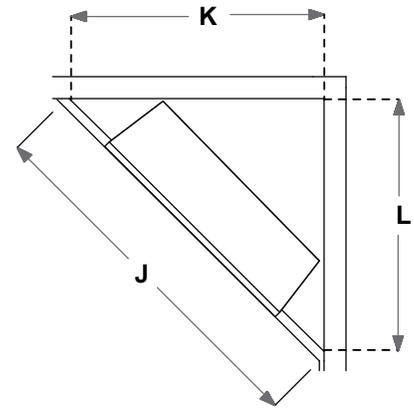

Accessory Dimensions:

FINISHED TRIM DIMENSIONS

Trim Kit	A	B	C
RBF24TRIM36 - 36" Black Installation Trim	36" (91.4 cm)	30" (76.2 cm)	2" (5.08 cm)
RBF24TRIM40 - 40" Black Installation Trim	40" (101.6 cm)	30" (76.2 cm)	
RBF30TRIM38 - 38" Black Installation Trim	38" (96.5 cm)	29-5/8" (75.4 cm)	
RBF30TRIM44 - 44" Black Installation Trim	44" (111.8 cm)	32-5/8" (83.0 cm)	

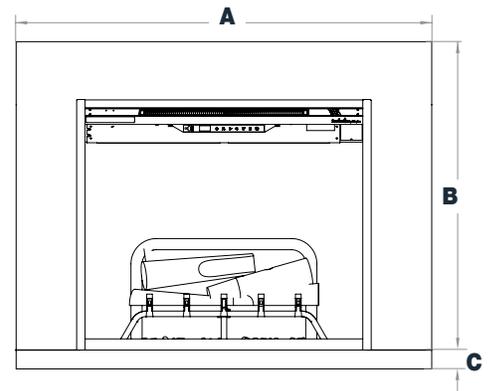

Scan for more information on dimensions, accessories, technical details.

To view full series visit:
dimplex.com

1-800-668-6663