



TOP VIEW

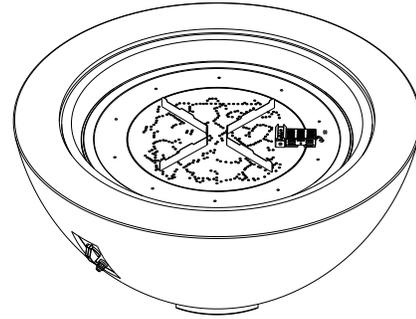


ISOMETRIC VIEW

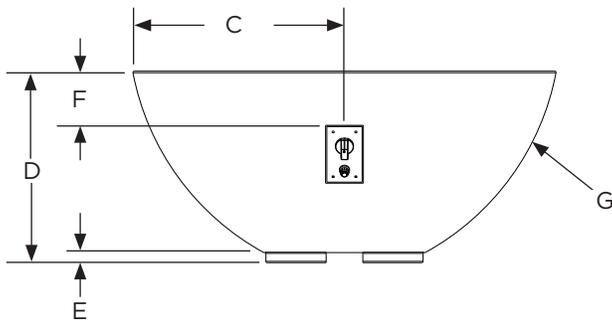

FRONT VIEW

(Φ H refers to circular opening in bottom of base for plumbing, electrical, etc.)

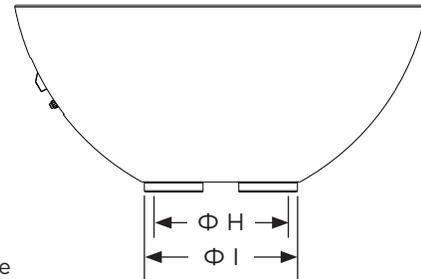

RIGHT VIEW

ITEM CODE	BURNER INCLUDED	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)	H (in.)	I (in.)	WEIGHT(lbs.)
CV-20(XX)	CFP20	29.25	21.25	14.63	15.25	0.75	3.00	R20.00	10.50	13.50	154
CV-30(XX)	CFP30	42.00	32.50	21.00	19.00	1.00	5.38	R25.88	13.00	16.00	279
CV-30E(XX)	BI28	42.00	40.00	21.00	19.00	1.00	5.38	R25.88	13.00	16.00	279

Technical Specifications:

- CLEARANCE TO COMBUSTIBLES**
 - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials
- GAS SUPPLY**
 - Natural Gas - Operating Supply Pressure: Min 6" WC; Max 10.5" WC; IDEAL 7" WC
 - Liquid Propane - Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC
- CONTROLS**
 - Thermocouple safety valve and push-button sparker
 - Valve connected to burner; intended for installation on base control panel
- BURNER LISTING**
 - Standard: ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
 - Testing Agency: Underwriters Laboratories (UL LLC)
- BASE MATERIAL**
 - Glass-fiber reinforced concrete
 - Non-combustible material tested to ASTM E136-16

BASE COLOR DESIGNATORS (XX)	
-	NATURAL GREY
WT	WHITE
LN	LINEN
MM	MIDNIGHT MIST
LT	LATTE
ES	EARTHSTONE

Included Items: Tempered glass burner cover (not applicable to CV-30E)

Optional Items: Tempered glass wind guard, additional media options